



CHR[®] TAPE 

CHR[®] HM430/HM650

Specialized for Extreme Conditions

White, High Modulus PTFE Pressure Sensitive Adhesive Tape

CHR[®] HM350 and HM426 are manufactured from modified high-modulus PTFE film coated with high-temperature silicone adhesive.

Features/Benefits


The film of both CHR[®] HM430 and HM650 has been subjected to a special process that lowers its elongation and increases its breaking strength for easier handling. One side has an acrylic/silicone pressure sensitive adhesive and the other side offers low coefficient of friction film, which is thin and conformable. The backing offers excellent high temperature resistance and is chemically inert. This tape construction is weather resistant, stable and non-toxic. CHR[®] HM650 meets the requirements of MIL-I-23594C Type 1, Class 4.

Availability

Factory stock for CHR[®] HM430 is in master log form 33 m x 737 mm wide and HM650 is 33 m x 483 mm wide. Rolls can be slit 12.7 mm to full width. For slit rolls under 12.7 mm wide, Saint-Gobain Performance Plastics recommends 16.5 m length rolls. They are available with or without a liner.

Applications

CHR[®] HM430 and HM650 are often used as masking during metal bonding, roll covering on plastic extruders, and for fine wire harnesses. They are chosen for lay flat operations where anti-friction properties and solvent resistance are required.

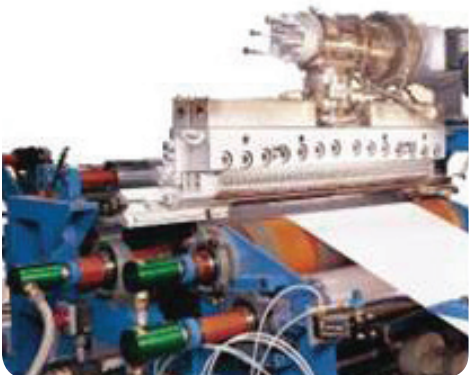


SAINT-GOBAIN

CHR® HM430/HM650 Properties

Performance tests are run using standard test procedures.
The values presented are typical values and should not be used for specification purposes.

Product Number	HM430	HM650
Backing Material	Film-PTFE	Film-PTFE
Adhesive Type	Acrylic	Silicone
Total Thickness (mm)	0.089	0.165
Backing Thickness (mm)	0.051	0.127
Adhesive Thickness (mm)	0.038	0.038
Adhesion to Steel (N/cm)	2.7	3.3
Tensile Strength (N/cm)	44	79
Elongation (% at break)	150	200
Dielectric Strength (volts)	8,000	13,500
Direct Electrolytic Corr.	1.0	1.0
Operating Temperature (°C)	-29 to +177	-73 to +260
Insulation Class (°C)	155	180
Colour	White	White

CHR® is a registered trademark.



Saint-Gobain

AMERICAS
Tel: (800) 962-2666
(518) 686-7301

EUROPE
Tel: +44 (0) 1706-746900

ASIA
Tel: (886) 2-2503-4201

www.foamsandtapes.saint-gobain.com

AMERICAS: 14 McCaffrey Street, Hoosick Falls, NY 12090, USA

EUROPE: Bay 3 Transpennine Industrial Estate, Gorrels Way, Rochdale, OL11 2PX, UK

ASIA: Room 302,3F-1, 147 Jianguo North Road, Section 2, Taipei, Taiwan, 104

The data and details in this document were correct and up-to-date at the time of printing and are intended to provide information on our products and their possible applications. It is the user's responsibility to obtain the latest version of the product data sheet. This data sheet is not a specification and does not assure specific product characteristics or make reference to the suitability of the product for a specific application. Because Saint-Gobain cannot anticipate or control every application, we strongly recommend testing of this product under individual application conditions. The application, use and conversion of this product are the user's responsibility.

Limited Warranty: For a period of 6 months from the date of first sale, Saint-Gobain Performance Plastics warrants this product(s) to be free from defects in manufacturing. Our only obligation will be to provide replacement product for any portion proving defective, or at our option, to refund the purchase price thereof. User assumes all other risks, if any, including the risk of injury, loss or damage, whether direct or consequential, arising out of the use, misuse or inability to use this product(s).

SAINT-GOBAIN PERFORMANCE PLASTICS DISCLAIMS ANY AND ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

NOTE: Saint-Gobain Performance Plastics Corporation does not assume any responsibility or liability for any advice furnished by it, or for the performance or results of any installation or use of the product(s) or of any final product into which the product(s) may be incorporated by the purchaser and/or user. The purchaser and/or user should perform their own tests to determine the suitability and fitness of the product(s) for the particular purpose desired in any given situation.

HM430&HM650-EN-CHREU-RR-1605

©2016 Saint-Gobain Performance Plastics